

LA-UR -81-1816

CONF-81-6-27


TITLE: Nuclear-Explosion-Driven Experiments

MASTER

AUTHOR(S): C. E. Ragan

SUBMITTED TO: The American Physical Society 1981 Topical Conference
on Shock Waves in Condensed Matter, June 23-25, 1981
SRI International, Menlo Park, CA

University of California

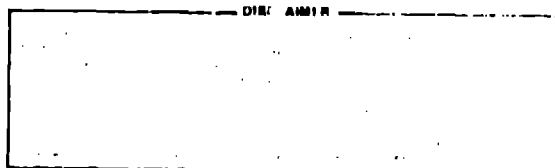

By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes.

The Los Alamos Scientific Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy.



LOS ALAMOS SCIENTIFIC LABORATORY

Post Office Box 1663 Los Alamos, New Mexico 87545

An Affirmative Action/Equal Opportunity Employer

Nuclear-Explosive-Driven Experiments*

Charles E. Ragan
Los Alamos National Laboratory, Los Alamos, NM 87545

ABSTRACT

Ultrahigh pressures are generated in the vicinity of a nuclear explosion. We have developed diagnostic techniques to obtain precise high pressures equation-of-state data in this exotic but hostile environment.

INTRODUCTION

Dynamic shock wave experiments using conventional laboratory techniques are limited to pressures considerably below 1 TPa for most materials. Underground nuclear explosives provide a means for reaching considerably higher pressures but in a much more hostile environment. We have developed experimental techniques which can be used in this environment to obtain precise equation-of-state (EOS) data at pressures from 1 to 100 TPa. There are two basic types of shock-wave experiments in which Hugoniot data are obtained: 1) absolute measurements in which both the shock velocity and particle velocity are determined, and 2) measurements made relative to a standard material whose Hugoniot is known. We have performed both types of experiments using a Doppler-shift technique for the absolute measurement and the impedance-matching technique for the relative measurements. This poster-session paper summarizes our experimental methods and shows some of the details of the techniques.

EXPERIMENTAL TECHNIQUES

Figure 1 gives an overview of our high-pressure program with a summary of past results and a list of the personnel involved. Figure 2 illustrates the Doppler-shift technique and shows some experimental details along with the results of our measurement at 2.0 TPa. Figure 3 summarizes the impedance matching technique and shows the experimental details of our previous measurements. Figure 4 summarizes a symmetric-impact technique that is being developed to obtain absolute Hugoniot data for a standard material at pressures up to ~10 TPa.

SUMMARY

Experiments using underground nuclear explosives have extended the accessible pressure range up to ~10 TPa. These measurements have stimulated improved theoretical treatments and provide benchmarks for checking sophisticated EOS theories. We are planning an impedance-matching experiment to obtain additional data for a number of sample materials and thus provide consistency checks for the

* Work supported by the U. S. Department of Energy.

various EOS theories. Future experiments at even higher pressures should provide tests of statistical models, which are assumed to be valid at extremely high pressures.

NUCLEAR-EXPLOSIVE DRIVEN EXPERIMENTS

Charles E. Ragan **Los Alamos**



NUCLEAR EXPLOSIONS PROVIDE A MEANS FOR ATTAINING SHOCK PRESSURES OF 10 TO 1000 MBAR. WE HAVE OBTAINED PRECISE DATA AT PRESSURES UP TO 70 MBAR IN BOTH ABSOLUTE AND RELATIVE EXPERIMENTS.

A. ABSOLUTE MEASUREMENT

- 1) Mo at 20 Mbar
- 2) Measure Shock Velocity (D) and Particle Velocity (u)
- 3) Use Doppler Shift of Neutron Resonances for u (± 2 to 6%)
- 4) Use Evacuated Light Pipes for D (± 2 to 6%)
- 5) Comparison of Theory with Experimentally Determined Point for Mo at 20 Mbar

B. RELATIVE MEASUREMENTS

- 1) Impedance Matching
- 2) Mo Standard
- 3) Planar Shock
- 4) Measure Shock Velocities ($\pm 1\%$)
- 5) Use Electrical Contact Pins (± 1 ns)
- 6) Data for U, Pb, Fe, Al, Quartz, low-density Mo
- 7) Experimental Result () for U at 67 Mbar and Calculated Hugoniot (---)

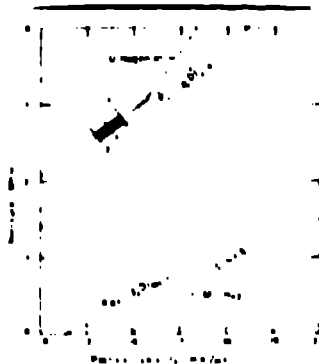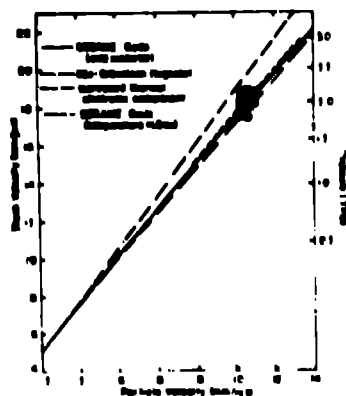

- DATA RECORDING - Detector Signals are Transmitted - 500 m over Coaxial Cables to High-Speed Oscilloscopes; Photographs of the Traces are Recorded along with a Time Base
- PRINCIPLE INVESTIGATORS: Charles E. Ragan, Ben C. Diven
- SUPPORT: a) Experimental: William A. Treadwell, Ed R. Robinson, Manuel J. Araya, b) Computational: Merv Fish, Rod E. Schultz

Fig. 1 Overview of the Los Alamos high-pressure experimental EOS program using underground nuclear explosives with a summary of previous absolute and relative measurements.

DOPPLER SHIFT TECHNIQUE


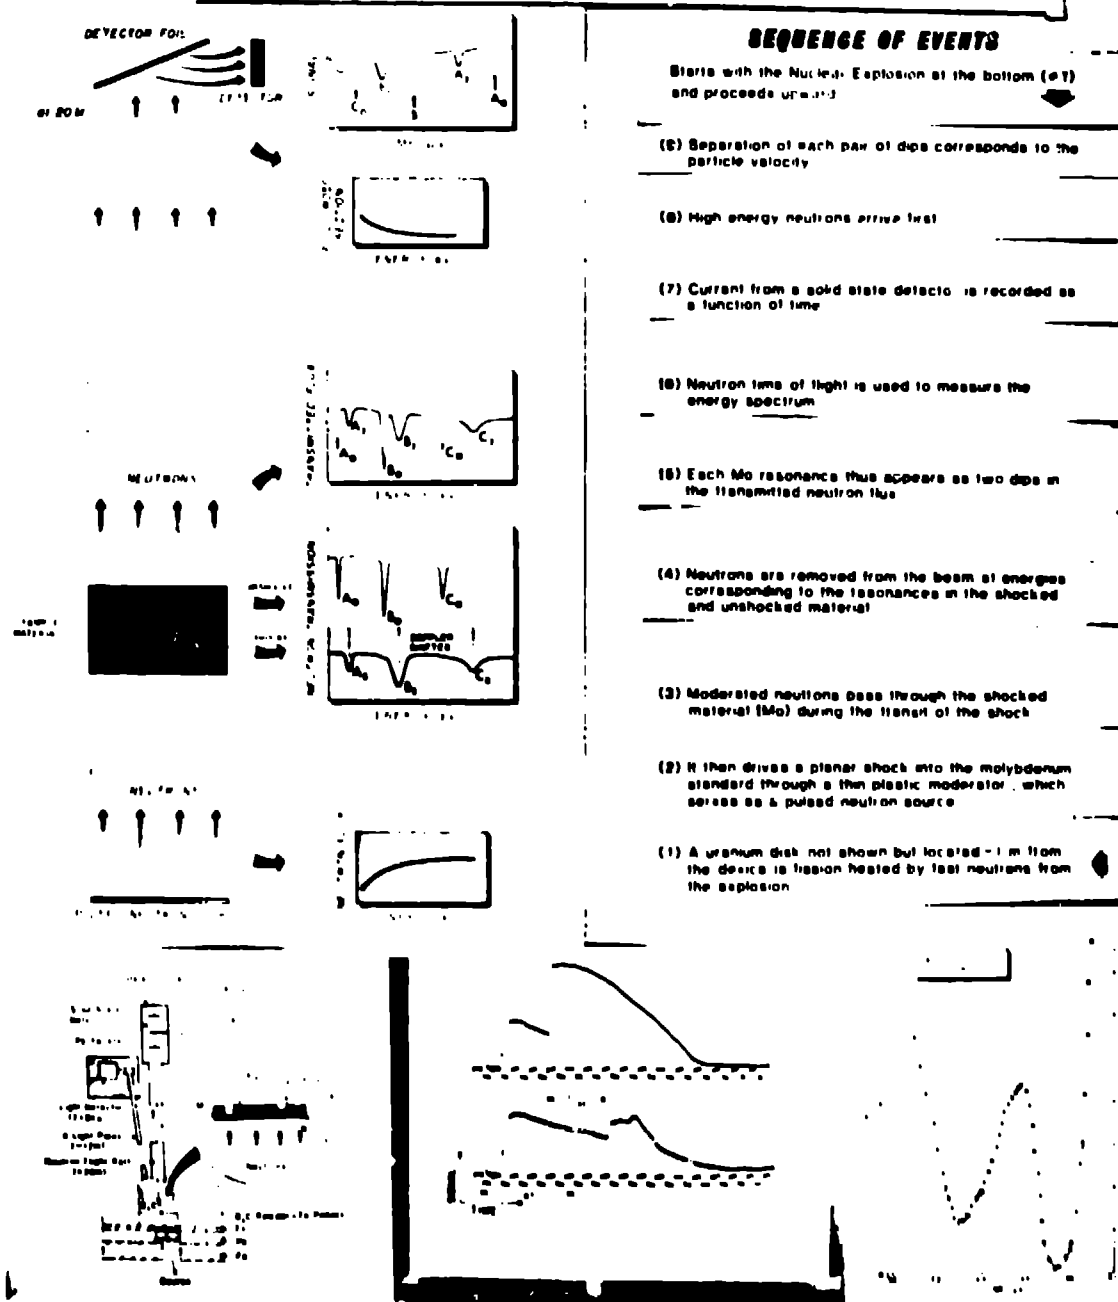


Fig. 2 A summary of the Doppler-shift technique for measuring the particle velocity. Various phases of the process are indicated in the upper portion, and the experimental details are shown at the lower left. The lower right shows the digitized data from a solid state detector and the center signals are from photomultiplier detectors at the tops of the light pipes.

IMPEDANCE-MATCHING TECHNIQUE

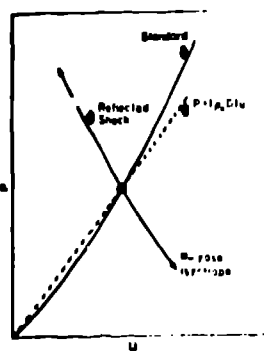

- A planar shock is produced in a Mo standard using a Pb driver
- An array of electrical contact pins is used to determine the shape of the shock front and the shock velocity
- The initial state of the standard is determined from its calculated Hugoniot and measured shock velocity
- At the interface with the sample, the shock pressure changes either along the reflected shock (RS) Hugoniot or along the release isentrope (RI)
- The measured shock velocity for the sample defines the line $P = (\rho_0 D)u$
- The intersection of this line with the RI or the RS Hugoniot locates a point on the sample Hugoniot










Fig. 3 Summary of the impedance-matching technique illustrating the analysis procedure for determining a Hugoniot point from measurements of shock velocities in a standard and a sample material. The results of the measurement on uranium at 6.7 TPa are shown in the central position and the lower part shows the details for the experiment with 13 samples.

OTHER TECHNIQUES AND APPARATUS

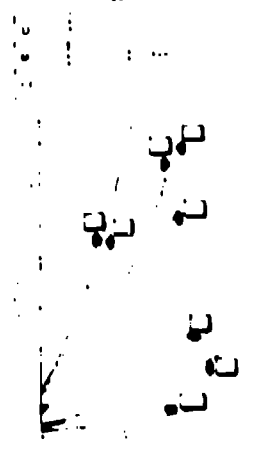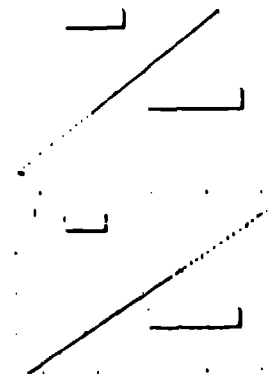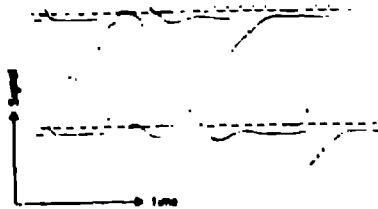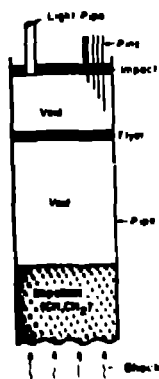

- Feasibility study of symmetric impact experiments at 30 to 50 Mbar for Mo.
- Measure velocity (W) of Mo flyer plate and shock velocity (D) in Mo target.
- Use electrical contact pins to measure W and D.
- Determine temperature history of Mo flyer from light emission in the visible.
- Calculated flyer temperature of 3000° to 5000° C.
- Acceleration technique for flyer
 - Shock produced in stack of polystyrene disks.
 - Free surface blow-off velocity = 100 km/s.
 - Blow-off accelerates Mo flyer plate.



Fig. 4 Details of a feasibility study using a nuclear explosion to drive a flyer plate in a symmetric impact experiment, which can provide absolute Hugoniot data for a standard material.