

LA-UR -79-1821

CONF-740767-24

TITLE: A SURVEY OF SPECIAL NUCLEAR MATERIAL VEHICLE MONITORS FOR
DOMESTIC AND INTERNATIONAL SAFEGUARDS

AUTHOR(S): Paul E. Fehlau, Henry F. Atwater, John T. Caldwell,
and Edward R. Shunk

SUBMITTED TO: INMM 20th Annual Meeting, Albuquerque, NM,
July 1979

MASTER

University of California

By acceptance of this article, the publisher recognizes that the
U.S. Government retains a nonexclusive, royalty-free license
to publish or reproduce the published form of this contribution,
or to allow others to do so, for U.S. Government purposes.

The Los Alamos Scientific Laboratory requests that the pub-
lisher identify this article as work performed under the aus-
pices of the U.S. Department of Energy



LOS ALAMOS SCIENTIFIC LABORATORY

Post Office Box 1663 Los Alamos, New Mexico 87545
An Affirmative Action/Equal Opportunity Employer

Form No. 838 R3
SI. No. 2829
12/78

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

UNITED STATES
DEPARTMENT OF ENERGY
CONTRACT W-7405-ENG-36

A Survey of Special Nuclear Material Vehicle Monitors for Domestic and International Safeguards

Paul E. Fehlau, Henry F. Atwater, John T. Caldwell, Edward R. Shunk
Los Alamos Scientific Laboratory, Los Alamos, New Mexico, 87545

ABSTRACT

Special nuclear materials vehicle monitors, including gateside vehicle monitors, hand-held personnel-vehicle monitors, and a new tunnel monitor concept for very large vehicles, are discussed. The results of a comparison of effectiveness of monitors for domestic application are presented. The results of calculations and small scale prototype measurements are given for a tunnel-like neutron monitor for monitoring at the perimeter of an enrichment plant subject to International Safeguards.

I. INTRODUCTION

Group Q-2 of the Los Alamos Scientific Laboratory (LASL) has as its primary function the development and utilization of instrumentation for the detection and identification of special nuclear materials (SNM) in application to problems in domestic and international nuclear fuel cycle safeguards. In connection with our work in instrumentation for domestic perimeter safeguards, we were asked by the Department of Energy (DOE) Office of Safeguards and Security (OS) to investigate the effectiveness of SNM vehicle monitors. At the same time, a parallel effort dealing with instrumentation that might be applicable to perimeter safeguards applied by the International Atomic Energy Agency (IAEA) at a centrifuge enrichment plant was undertaken and the need for monitoring very large vehicles for undeclared feed material arose. As a result, we are investigating, through calculation and measurement on both up and full scale working models, the effectiveness and performance of a variety of detector systems for bus vehicle monitoring.

II. MONITOR TYPES

SNM vehicle monitoring began at the DOE Rocky Flats Plant with a vehicular gate monitor¹⁾ that resembles a personnel SNM doorway monitor except that it was installed at a two lane vehicle gate. The specifications for this monitor have been used by others to procure vehicle monitors.

In our studies we have used two monitors in a gateside geometry. One is a system sold by Tom Scott's Associates that follows the specifications mentioned above using five 5.08-cm diam by 2.54-cm thick NaI scintillators,

two on each side of the gate, vertically separated by 1.6 m.). The second gateside monitor was constructed from components of a LASL-personnel doorway monitor²) that utilized plastic scintillators. This unit had four 5.08-cm diam by 91-cm long solid organic scintillators (NE-110), with two on each side of the gate. These gateside monitors were used to carry out static count rate measurements on a source-containing vehicle at gate widths up to 7.3 m separation between detectors.

In order to minimize the separation between the detectors and the vehicle without obstructing traffic, we have constructed a roadbed gate monitor as shown in Fig. 1. This roadbed monitor utilizes a pit to house its array of eight NaI detectors that are optimized for the detection of shielded plutonium.³) Aluminum diamond plate and grating are used for vehicle support to minimize absorption of gamma radiation, and moisture problems are minimized through a gravity drain in the pit and waterproof encapsulation of the detectors.⁴⁾ Signal conditioning electronics for the monitor located in the guard station, as well as controllers for current loops located in the roadbed, are used for occupancy and traffic direction data. A microwave electronic vehicle identification system⁵⁾ also has its electronics housed in the guard station. The identification data, along with all of the detector counting data, is transmitted by overhead lines to an adjoining building and is input to a Data General MicroNova minicomputer

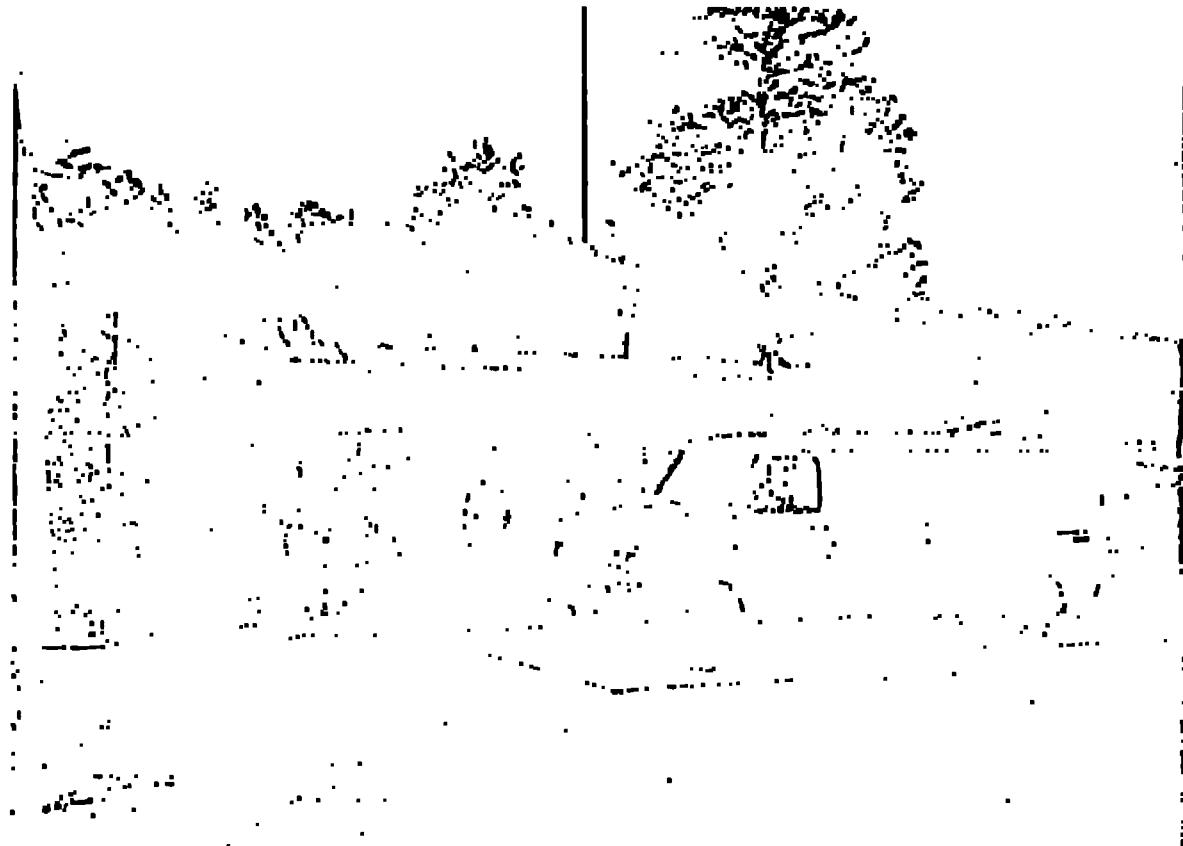


Fig. 1. LASL Q-2 SRM Vehicle Roadbed Monitor.

serving all logic and control functions for the monitor. Also on top of the adjoining building is a background monitor used to detect site-produced background conditions that interfere with monitor operation. We used this monitor for static measurements on the same source-containing vehicle, the one-ton Ford van, as we used in the gateside monitor. The roadbed monitor detector pit also contains an array of 48 BF_3 proportional counters⁶⁾ used to make neutron measurements for comparative purposes.

A third vehicle monitor that has been in use at LASL and other DOE installations is the hand-held monitor.⁶⁾ This monitor was developed at LASL Q-2 to provide an instrument capable of detecting small changes in gamma radiation count rate without requiring a great deal of operator training and experience. To this end, the package contains logic circuitry in addition to the usual battery-operated power supply, signal conditioning electronics, and NaI scintillation detectors. Figure 2 shows the hand-held monitors in two forms. The original unit, which we call a personnel-vehicle monitor (PVM), has a logic circuit that calculates an alarm level that is a mean background count plus a selectable fraction of the background. For instance, a commonly used selection is to alarm when the count in a count interval exceeds 1.4 times the mean background. The second instrument, the delta rate monitor (DRM) that is just now being



Fig. 2. The PVM and DRM Hand-held Monitors.

procured in quantity, utilizes an alarm circuit that adds a switch selectable number to the mean background to obtain the alarm level. In using this instrument the operator varies the switch setting so as to obtain 2-6 alarms per minute from statistical variation. The essential difference between the PVM and DVM is that, i.e. an increasing background, the signal required to alarm the monitor increases directly with the background in the PVM, while in the DVM the increase is not so great. In practice, acceptable performance is achieved at Los Alamos at approximately 3 times normal background for the PVM and at approximately 10 times normal background for the DVM.

The tunnel monitor for large vehicles⁷⁾ was designed to meet the need to detect undeclared feed material entering a uranium enrichment plant and it is a neutron detector system that looks for neutrons produced in spontaneous fission of ^{238}U or ^{240}Pu and (α, n) neutrons in ^{235}U . The tunnel approach shown in Fig. 3 was used to maximize the detector solid angle to achieve the necessary total efficiency to detect a rather low source strength material that could be heavily shielded in a large truck or railway freight car. The overburden shown reduces cosmic ray-produced neutron background and the tunnel has a polyethylene lining that serves to thermalize neutrons originating inside the monitor, trapping them there until detected by the proportional counter mounted on the walls. While the full scale railway car monitor may be too expensive for immediate application, the concept of lining high neutron albedo walls with a few proportional counters to produce a high total efficiency neutron detector has already been applied in a personnel monitor.⁸⁾ At LASL we have constructed a small vehicle tunnel that has been used for measurements to validate calculations of efficiency and scaling laws.

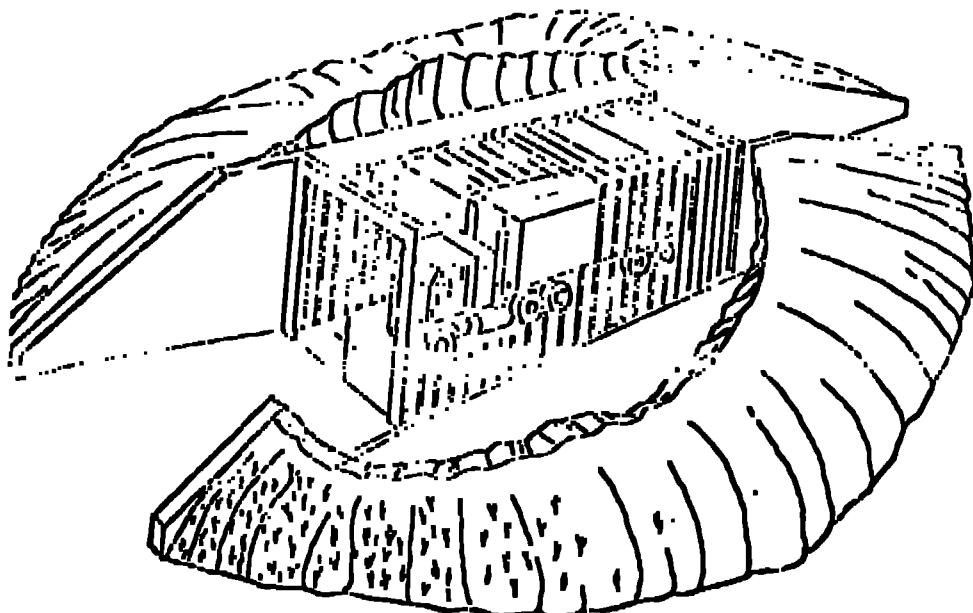


Fig. 3. The Tunnel Neutron Detector.

III. EFFECTIVENESS

In order to make a comparison between different monitor types, we have made static measurements using a particular vehicle and source set. It should be emphasized that these are laboratory measurements made under a controlled environment and the equipment is not in routine monitoring use. The sources used for comparison were: 1) a 25-g weapons grade plutonium sample in the form of PuO_2 with low ^{241}Am content; 2) a 1-kg high enriched uranium (HEU) metallic sample. Both sources were in the form of height-equal-to-diameter cylinders and the plutonium was doubly encapsulated in thin stainless steel. The measurements were made with the source located in the vehicle at a position that gave minimum response for that particular monitor. The positions were between the front seat backs on the floor with the door posts in line with the detectors for the gatetube monitor, and near the roof above an OHV gasoline motor generator and voltage regulator for the roadbed monitor.

To make a comparison, we have calculated the counting time necessary to just detect the source using as an alarm level the mean background plus four standard deviations. A complicating factor is that the presence of the vehicle suppresses the background count rate to a significant extent, but here we assume that an occupancy monitor is used and a correction is made in the monitoring algorithm to compensate. The results given in Table I indicate that for plutonium monitoring there are only minor differences between gatetube monitors, while the neutron system is clearly inferior.

Table I

Monitor	Minimum Time Required to Detect 25-g PuO_2	Minimum Time Required to Detect 1-kg HEU metal
RaT gatetube	6.2 s	20.0 s
Plastic gatetube	1.5	7.7
Roadbed - gamma ray	5.5	160.0
Roadbed - neutron	50.0	---

*Minimum count time required to detect specified source in stationary vehicle monitor.

This question will be explored further to see if the conclusion holds for more heavily shielded materials. The results for HEU are more divergent because the transmission of the softer radiation tree-creeps in less through the vehicle materials. Here, the performance of the roadbed monitor clearly suffers from its unshielded nature. A supplementary detector array on a canopy above the vehicle would improve performance. In both cases, the plastic gatetube monitor shows better performance. The reason is the gatetube monitors' detectors are designed to give equal performance for unshielded sources, while in vehicle monitoring, the softer radiation is attenuated by the vehicle materials and we are looking at shielded materials. The efficiency of the RaT detectors decreases with gamma energy, while the plastic actually increases in the upper end of the energy region used.

We have not included data on the hand-held units because the effectiveness includes the performance of the human operator in addition to the instrument. We do know that the samples can be detected from outside the vehicle without opening doors or hood in a background that takes approximately 20 seconds. We also know that when the doors and hood are opened and the instrument is used to scan the interior, much smaller samples can be detected. However, we need to study the man performance of the guard force to determine a threshold detectable source and mean search time in order to make an adequate comparison. We intend to do this.

In order to include a comparison of the tunnel monitor, we have studied its characteristics and how they vary with monitor size through Monte Carlo calculations and verifying measurements in a mockup monitor that lacked only the overburden. The calculations show the detector response is relatively independent of source position and the efficiency of the detector scales with the ratio of projected proportional counter area to enclosure surface area. Backgrounds are simply proportional to detector projected area and shielding provided, and we have found that the time to detect at an alarm level an event above is given by the expression:

$$T = 30 A_t^2 / (\rho^2 \lambda_{pe} S)$$

The parameters are: A_t - size in m^2 , λ_{pe} - neutron source strength in n/s , ρ - projected counter area in m^2 , S - a cosmic ray shielding factor, and T - the time to detect in seconds. For a monitor of this type that would contain cars and small trucks up to typical flat-bed truck size, the parameters are: $A_t = 82 \text{ m}^2$, $\lambda_{pe} = 0.05 \text{ n/s}$ for 1.63 m proportional counters, $S = 1.4$ (0.25 m concrete), $\rho = 3 \times 10^3 \text{ m}^2$ for our plutonium sample, and the resultant event time is 0.007 s. Thus, this monitor is not only superior to the roadbed monitor neutron system, it also surpasses the gamma system performance. On the other hand, the neutron source strength of the IECI is so low, at least 2 n/s for our 1-kg sample, this monitor is not capable of detecting it. For comparison, in its intended use for undelivered feed material, 1 kg of ^{235}U feed would require about 40 seconds to detect.

IV. OTHER CONSIDERATIONS

A most important consideration for monitors is cost and we find that the least expensive monitor, the hand-held type at an estimated cost of \$7000 each, is quite effective; but the cost is time consuming when validation of a particular inspection point is due to personnel cost factors that must be considered in addition to training costs.

Carable monitors are more expensive, approximately \$20,000 each, installed with occupancy monitor. The roadbed monitor with the vehicle identification package is estimated between \$50-80,000 each. These monitors have an advantage in performing their task uniformly and, for the most part, painlessly without a supervisor present. They also do not require opening the vehicle and can monitor tall vehicles. The roadbed monitor, through its identification system and computer, can do bookkeeping using accumulated results for vehicles that pass frequently and achieve a higher sensitivity. This technique has been described in personnel monitoring by C. R. Henry and

J. C. Pratt⁹) and is effective in detecting less than single-pass-detectable quantities of material removed during many programs. This technique will allow us to do a better job of monitoring the vehicles that make frequent use of the gate.

The tunnel monitor is the most sensitive and ranges from a cost estimate of $\$1 \times 10^6$ for a railway-semitruck size to $\$2 \times 10^5$ for one that might apply for trucks up to the size we have been considering. For plutonium or undeclared feed monitoring, its cost is balanced by its effectiveness. In domestic safeguards where uranium is usually of interest, it is not applicable.

V. SUMMARY

Our task is not complete, but the emerging conclusions indicate that a good job can be done in vehicle monitoring for plutonium with short count times. For uranium, the times required are longer whether they be count times or the time required for opening vehicle access points for manual search. In our continuing effort we will study the manual search as well as obtain operational experience with the mobile monitor in single and multiple-pass monitoring.

ACKNOWLEDGMENTS

The authors would like to express their appreciation to members of IASL Group K-4 for their assistance in microchip vehicle identification, and Roger Payne of K-2 and the Q-2 staff for their help in monitor and workshop construction.

The work reported here was performed under the auspices of the U. S. Department of Energy.

REFERENCES

1. J. W. Kirkness and C. J. Cunningham, "Road Flat-Security and Safeguards System: Nuclear Gate Tunnel," INSPN 14th Annual Meeting, Atlanta, Georgia, 1974.
2. W. H. Chardwick, et al., "Portal Monitor for Plutonium Safeguards," Los Alamos Scientific Laboratory, report, LA-5681, 1974.
3. T. R. Thompson, "Cross-Ray Detection Optimization for Mobile Detectors," Proceedings of ERDA Symposium on Neutron Cross-Ray Sources and Applications, p. 191, University of Michigan, Ann Arbor, Michigan, 1976.
4. S. D. Gardner, Editor, "Mobile Safeguards Research and Development Program Status Report," Los Alamos Scientific Laboratory report, LA-7516-PK, pp. 37-71, 1973.

5. J. A. Landt, et al., "The Los Alamos Scientific Laboratory Electronic Vehicle Identification System," Los Alamos Scientific Laboratory report, LA-7818-MS, 1972.
6. W. R. Kunz, et al., "Hand-Held SSM Monitor for Personnel and Vehicle Searches," in Nondestructive Evaluation in the Nuclear Industry, American Society for Metals, pp. 331-340, 1978.
7. J. T. Caldwell, et al., "A Large Vehicle Portal Monitor for Perimeter Safeguards Applications," presented at the 1st ESARDA Symposium on Safeguards and Nuclear Material Management, Brussels, Belgium, 1979, in the press.
8. D. L. Mengau, "A Personnel Portal for International Research Facility Safeguards," to be presented at the 20th Annual TAEC Meeting, Albuquerque, New Mexico, July 16-18, 1979.
9. C. H. Henry and J. C. Pratt, "A New Containment and Surveillance Portal Monitor Data Analysis Method," presented at the 1st ESARDA Symposium on Safeguards and Nuclear Material Management, Brussels, Belgium, 1979, in the press.