LEGIBILITY NOTICE

A major purpose of the Technical Information Center is to provide the broadest dissemination possible of information contained in DOE's Research and Development Reports to business, industry, the academic community, and federal, state and local governments.

Although a small portion of this report is not reproducible, it is being made available to expedite the availability of information on the research discussed herein.

Received by OSTI

AUG 0 4 1988

Los Alamos National Esboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36

TITLE: Neutron Induced Fission Cross Section Ratios for 232 Th, 235,238 U, 237 Np, and 239 Pu from 1 to 400 MeV

AUTHOR(S): P. W. Lisowski, J. L. Ullmann, S. J. Balestrini
Los Alamos National Laboratory, Los Alamos, NM 87545

A. D. Carlson, O. A. Wasson

National Bureau of Standards, Gaithersburg, MD

N. W. Hill

Oak Ridge National Laboratory, Oak Ridge, TN

SUBMITTED TO: International Conference on Nuclear Data for Science and Technology, Mito City, Japan, May 30 to June 3, 1988

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

MASTER

Lock t.

DISTRIBUTION OF THIS DOCUMENT IS UNLIME

By ecceptance of this article, the publisher recognizes that the U.S. Government rateins a nonexclusive, royalty-free ticense to publish or reproduce the published form of this contribution, or to attow others to do so, for U.S. Government purposes

The Los Atsmos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy



Los Alamos National Laboratory Los Alamos, New Mexico 87545

HEUTROW INDUCED FISSION CROSS SECTION RATIOS FOR $^{235}\mathrm{Th}$, $^{235,336}\mathrm{U}_{\odot}$ $^{237}\mathrm{Ep}$ AND $^{236}\mathrm{Pm}$ FROM 1 TO 400 MeV

P. W. Lisowski, J. L. Ullmann, S. J. Balestrini Los Alamos National Laboratory, MS D449, Los Alamos, New Maxico 87545 U.S.A.

> A. D. Carlson, O. A. Wasson Mational Burssu of Standards, Gaithersburg, Maryland U.S.A.

> > N. V. H111

Oak Ridge Mational Laboratory, Oak Ridge, Tennesses U.S.A.

Abstract: Time-of-flight measurements of neutron induced fission cross section ratios for 233,234U, 237Mp, and 239Mp, were performed using the WNR high intensity spallstion neutron source located at Los Alamos National Laboratory. A multiple-plate gas ionization chamber located at a 20-m flight path was used to simultaneously measure the fission rate for all samples over the energy range from 1 to 400 MeV.

Because the measurements were made with nearly identical neutron fluxes, we were able to cancel many systematic uncertainties present in previous measurements. This allows us to resolve discrepancies among different date sets. In addition, these are the first neutron-induced fission cross section values for most of the nuclei at energies above 30 MeV.

Introduction

The need for accurate fast-neutron-induced fission cross section data for long-lived actinides has long been recognized. Although measurements on many nuclei date back mers than 30 years1 significant inconsistencies exist and are now being uncovered. As an example, a recent measurement of the ratio $^{230}{\rm Pu}(n,f)/^{23}{\rm U}(n,f)$ shows an \$8 difference from the EMDF/B-V evaluation at 14.7 NeV. The origin of discrepancies in neutren-induced fission cross section measurements is at least partly due to the fact that suitable neutron sources have not existed, aspecially in the HeV energy range. Many measurements made with mencenergatic or quasi-monoenergetic sources have had systematic errors as a function of energy because different source reactions had to be used to cover a broad energy range. The development of 'white' neutron sources drivum by sleutrem accelerators and their subsequent application to fission cross section seasurements represented a significant advance; but, these sources have adequate intensity for fission measurements only below about 30 MeV. In addition, most measurements have been made with only a few different isotopes simultaneously, therefore increasing the possibility of crossnormalization error.

The results reported in this paper are preliminary values of cross section ratics obtained using the Weapons Houtron Research (MMA) high-intensity spallation neutron source at Los Alames. These data will be supplemented by new results for the \$35U(n, f) cross section from 3 to 30 MeV, reported in another contribution to this conference and by additional measurements of Rapapere et al. up to 750 MeV.

Experimental Presedure

Los Alames Matienal Laboratory has recently commissioned a high-intensity white reutren source which will be used for basic and applied research. The facility uses 800 MeV pulsed proton beam from the Los Alames Meson Physics Facility (LAMPF) incident on a 7.5 om long, 3 cm diameter tungsten target. This source differs eignificantly from that used in serlier measurements because the neutron flux can be used at forward angles, providing as much as a three-fold increase in the neutron energy renge.

The results presented here were obtained using a 20 m flight path which viewed the neutron source at a production angle of 60°. The proton bean consisted of 250 ps wide pulses separated by # 4 με with 3 x 10° protons in each pulse. The macroscopic duty factor of LAMPF gave a rate of about 8000 of proton pulses/second. The neutron been was transported in an evacuated flight tube and passed through a 2.54-on thick polyethylane filter to reduce frame overlap; a permanent magnet to sweep out charged perticles; and e system of three collimators as shown in Ref. 4, giving a beam diameter of 12.7 cm at the fission sample location. The technique used in both the neutron flux and the fission cross section ratio measurements is contained in Ref. 4, and will not be further described here. After passing through the fission chamber, the neutron bear passed through sir to an annular proton recoil telescope (APT) which was used to provide a measurement of the neutron flux shape up to 30 NeV using the H(n.p) reaction, and then to a shielded beam dump 5-m downstream. A measurement of the neutron fluence obtained using the $^{335}U(n,f)$ yield rate and the fission eross section data of Ref. 5 is shown in Fig. 1, where the solid line is from an intra-muclear descade calculation. Above about 20 NeV, the calculated values substantially under-predict the data. These measurements agree with the trend of the fluence data up to 30 MeV obtained using the APT and described in our companion paper. The fission chamber held multiple foils of oxide material 10,2-om in diameter vacuum evaporated onto 127-um thick stainless steel backings. The fission foil deposits were typically 200 mg/cm3 thick as determined by weighing samples produced during the vacuum evaporation process. We plan to verify uniformity at a later time by alpha counting. In addition to the fission foils, SMCf deposit and a blank steel foil were included in the chamber. The SMCf was used to gain match pulse height spectre and for disgnostic purposes, and the blank foil was used to messure the background centribution from neutron induced reactions. That background was negligible below 30 MeV and only about three percent at 400 MeV. For these results it was ignored. Flight paths from the neutron production target to the ficeion foil location were obtained using 12C neutron transmission resonances.

Results and Conclusions

Preliminary values of our fission cross esction ratios in 30 energy bins are shown in Fig. 1 for ²³³Th, ²³⁷Mp, ²³⁶U, and ²³⁶Pu relative to ²³⁵U. These data were obtained by assembly and the same obtained by assembly to ²³⁵U. These data were obtained by computing a single normalisation factor for each sample using the results of Meadows over the 1 to 10 MeV energy range. They are only a small part of the total data evailable for final analysis. The solid lines show the EMDF/B-V ratios, which have eignificant differences from our new values in the cases of ²³⁷Ne and ²³⁶Pu. These data represent the only fission results above about 30 MeV for most of the nuclei, and are the most comprehensive ever obtained over the entire energy range under such nearly identical experimental conditions. Comparison of these data with similar results taken over a year verlier show agreement within the statistical uncertainties of about 20. Over the energy range from 1 to 20 MeV, Fig. 3 shows fission cross sections obtained by multiplying our ratio date by the EMPF/B-V evaluation for the ^{23 b}U fission cross section. In general, ²³²Th and ²³⁶U show good agreement with EMPF/B-V whereas ²³⁷Hp and ²³⁶Pu have atmiffered decreased and agreement. Pu have significant discrepencies. Our results are not in agreement with the simple argument that fission cross sections are geometrical at high energies. Although the ratios of \$37 Mp and \$150 Pu to \$150 are nearly unity as would be expected from such a picture. \$150 Pu and \$150 Pu ratios approach 0.5 and 0.9 respectively. Hore sophisticated theoretical analyses now in progress at Los Alemes indicate that our higher energy data is difficult to reproduce with parameters normally used in traditional models

During the summer of 1988, further measurements and data analysis are planned which should significantly reduce the statistical uncertainties from these presented here. How fission foils are now being fabricated for ^{321,234,336}U, and measurements using those samples are planned for later this year.

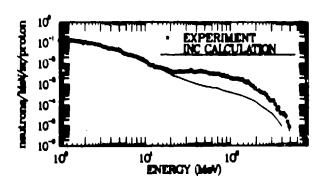


Fig. 1. Comparison of the present measurements of neutron fluence chape with Intra-Muclear Caecade Model predictions.

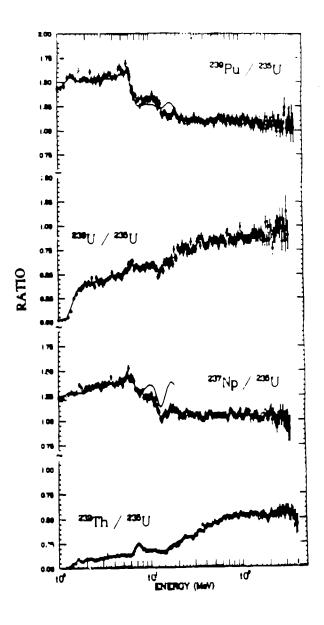


Fig. 2 Preliminary results of fiscion cross section ratios from 1 to 400 MeV.

The solid line extending to 20 MeV is from EMDF/B-V.

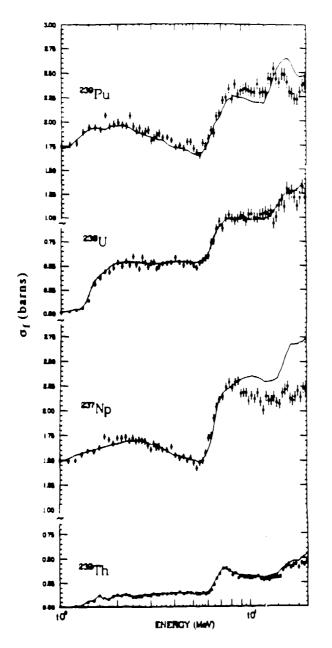


Fig. 3 Preliminary fiscion cross section results from the present measurement from 1 to 20 MeV. The solid line is from ENDF/B-V.

References

- G. A. Jervie, "Fiscien Comperison of ²³⁶U and ²³⁵U for 2.5 MeV Neutrons," LA-1571, Los Alamos Scientific Laboratory (1953).
- Alamos Scientific Laboretory (1953).

 2. J. W. Meadows. "The Fisuion Crose Sections of 236Th. 232Th. 235U. 236U. 2
- Hational Laboratory, (1986).

 3. F. C. Difilippo, R. B. Perez, G. de Sausaure, D. K. Olsen, and R. W. Ingle: Hucl. Sci. Eng. 68, 43 (1978).

 4. D. Carleon, O. A. Wasson, P. W.
- A. D. Carlson, O. A. Wasson, P. W. Lisowski, J. L. Ullmann, and M. W. Hill: this conference.
- J. Rapaport, J. Ullmann, R. O. Nelson, S. Secetrom-Horrie, S. A. Wender, and R. C. Haight, "Preliminary Heasurement of the 335U(n,f) Crose Section up to 750 MeV," LA-11078-MS, Los Alamos Mational Laboratory (1987).
- S. A. Wender, P. W. L'sowski, S. Sasetros-Horris, R. O. Helson, J. L. Ullmann, T. Burritt, and J. Rapaport: Proc. of an International Conference on Mautron Physics, Kiew USSR, 1987 (to be published).
 R. L. Schitt, R. E. Shamu, P. W. Lisowski.
 - R. L. Schitt, R. E. Shamu, P. W. Lisowski, H. S. Moors, and G. L. Horgan: Phys. Lett. B203. 22 (1988)
- B203, 22 (1988).

 8. J. W. Headows, "The Fiscion Cross Sections of Some Thorium, Uranium, Heptunium and Plutonium Isotopes Relative to 121U."

 Argonna Mational Laboratory, ANL/WDM-31, (1983).