Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36.

TITLE: IMPROVED APPROXIMATIONS APPLIED TO THE S<sub>N</sub> EVEN-PARITY EQUATION

AUTHOR(S): TAEWAN NOH, WARREN F. MILLER, JR., JIM E. MOREL


# SUBMITTED TO: AMERICAN NUCLEAR SOCIETY WINTER MEETING--1993 November 14-19, 1993 San Francisco, CA

## DISCLAIMER

This report was prepared as in account of work spinwired by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employces, makes any warranty, express or outplied, or assumes any legal habitity or responsibility for the accoracy, completeness, or usefulness of any information, appointus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, tradetuark, manufacturer, or otherwise idoes not necessarily constitute or any igency thereof. The views and quinants of authors expressed herein do not necessarily state in reflect those of the United States Government in any agency thereof.

(ly acceptance of this which, the publisher recognizes that the U.S. Government retains e nonexclusive, ruyally-live ticanss to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes.

the Los Atamus National Cabulatory requests that the publisher identify this article as work partormed under the enspirors of the U.S. Department of Linergy

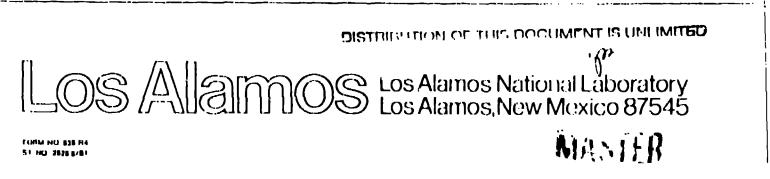

=

# Improved Approximations Applied to the $S_N$ Even-Parity Equation

Taewan Noh and Warren F. Miller, Jr. Los Alamos National Laboratory and University of California-Berkeley

and

Jim E. Morel Los Alamos National Laboratory Los Alamos, NM 87545

## Abstract

We have developed various finite element differencing schemes by applying lumping techniques in neutron streaming and removal terms of the  $S_N$  even-parity transport equation in two-dimensional x-y geometry. We have derived an analytic form of the even-parity reflective boundary condition, which along with the vacuum boundary condition can be applied directly to solve second-order even-parity boundary value problems. We have also developed a new *simplified even-parity* equation that is much more computationally efficient than the even-parity equation. The developed schemes are numerically compared with the conventional first-order diamond-differencing (DD) scheme.

## Тнеогу

The even-parity vacuum boundary condition can be easily derived<sup>1</sup> and after some algebraic manipulation, the even-parity *reflective boundary condition* can also be derived as

$$\hat{n} \cdot \nabla \chi(\vec{r}, \hat{\Omega}) = 0$$
  $\vec{r} \in \Gamma$ , all  $\hat{\Omega}$ , (1)

where  $\hat{n} = \hat{\Omega} - \hat{\Omega}'$  is a unit vector normal to the reflecting boundary and  $\chi$  the evenparity flux. Equation(1) is analytically correct and substituted for  $\chi(\vec{r}, \hat{\Omega}) = \chi(\vec{r}, \hat{\Omega}')$ type of implicit reflective condition which has been previously used but requires an extra iterative technique. This new step significantly improves computational efficiency. It was found that the reflective boundary condition of Eq.(1), when applied to the crossderivative terms in the even-parity equation, generate matrix asymmetries at boundary cells. Therefore, the differencing schemes for the regular even-parity equation result in an asymmetric 9-point operator. Several schemes are discussed below one of which eliminates this asymmetry.

## 1. Finite Element Differencing (EP959)

.

We can derive the discrete-ordinates, finite element differencing scheme by applying bi-linear interpolation functions to the variational form of the  $S_N$  even-parity equation. The resulting equation has a weighted 9-point discretization of the x-y derivative, a 5-point discretization of cross-derivative, and a weighted 9-point discretization of the removal term; hence we call it the 'EP 959' scheme.

## 2. Lumped x-v Derivative Differencing (EP559)

The 9-point discretization of the x-y derivative term can be simplified to a 5-point relationship using the common 3-point central differencings in the x- and y-directions.

## 3. Lumped Removal Differencine (EP951)

Alternatively, the removal term can also be lumped to a 1-point discretization.

## 4. Fully Lumped Differencing (EP551)

In this scheme, the lumping is applied to both the x-y derivative and removal term resulting in the 5-point and 1-point discretizations respectively.

## 5. S-molified Even-Parity Eduction (SEP501)

We have derived a new *simplified even-parity equation* (SEP). It can be obtained by applying the even parity equation for the direction  $(\mu, \eta)$  and  $(\mu, -\eta)$ , and adding the two resultant equations using the assumption  $\chi(\mu, \eta) = \chi(\mu, -\eta)$ . With the cross-derivative terms thereby eliminated, it is possible to have a symmetric 5 point finite difference approximation. This equation also reduces the angular domain by another half of that required by the regular even-parity equation. This simplification is a generalization of the reduced  $P_3$  angular approximation in the variational nodal approach developed by Lewis<sup>2</sup>. Logically, the justification for this simplification is that 1) SEP has the same diffusion limit<sup>4</sup> as the even-parity equation, 2) SEP is exact if the solution can be approximated by only the even power of  $\mu$  and/or  $\eta$  in  $P_N$  expansion, and 3) SEP gives the correct solution for the case of a flux that is dominated by behavior in only one dimension.

#### Results

ł

The developed differencing schemes for the even-parity equation are compared with the conventional first-order  $S_N$  transport code TWODANT<sup>3</sup> for a test problem. The problem consists of 10cm×10cm (20×20 cells) rectangular domain with reflective boundary conditions on the left and bottom, and vacuum boundary conditions on the right and top. The domain consists of the same material( $\sigma$ =1.0, c=0.9) but the constant source exists in the central zone only. The symmetric  $S_4$  quadrature set<sup>4</sup> is used so that the number of discrete ordinates should be equal to 12 for TWODANT, and 3 for SEP501, and 6 for the others. We performed the calculation with and without using the diffusion synthetic acceleration(DSA)<sup>4</sup> method. The final scalar flux distributions are all identical and the number of source iterations and the CPU consumed are summarized in Table 1. The SEP results are extremely close to the EP results for this problem.

### Conclusions

We have shown that the finite element differencing and its lumped schemes can provide promising properties when compared to the conventional first order DD scheme.<sup>4 6</sup> In particular, the proposed simplified even-parity equation, which is an elliptic equation, provides the economy of diffusion level calculation in each discrete

3

direction without causing severe errors and appears to be a candidate to replace the conventional DD scheme.

One of the drawbacks of the second-order  $S_N$  even-parity equation is the necessity to solve the matrix in each discrete direction. Therefore the right choice of the matrix solver is crucial in determining the economy of the even-parity codes. Presently, multigrid methods<sup>7</sup> are known to be faster than any other methods and have been developed for non-iterative boundary value problems. At present, a 9-point asymmetric multi-grid solver is implemented on the test codes. However, to have more economic performance, the multi-grid method should be tailored to accommodate the specific types of the matrices found in these approaches and to compliment the iterative solution techniques required by the transport equation. The EP and SEP run times in Table 1 can be further reduced.

Further work will be directed toward computational efficiency and determination of the accuracy of SEP.

# References

1. E. E. Lewis and W. F. Miller, Jr., Computational methods of neutron Transport, John Wiley and Sons, New York, 1984.

2. E.E. Lewis, Trans. Am. Nucl. Soc., 65, 200 (1992)

3. R.E. Alcouffe, F.W. Brinkley, Jr., D.R. Marr, and R.D. O'Dell, "User's Manual for TWODANT ... ", Los Alamos National Laboratory report LA-10049-M Rev. (1984)

4. W. F. Miller, Jr., Nucl. Sci. Eng., July 1991.

5. W.F. Miller, Jr., and T. Noh, Transport Theory and Statistical Physics, 22 (1993)

6. L. L. Briggs, W. F. Miller, Jr., and E. E. Lewis, Nucl. Sci. Eng., 57, 205-217 (1975).

7. J. E. Dendy, Jr., J. of Comp. Phy., 48 (1982).

Differencing	No. of Iterations		CPU time (sec)	
Schemes	w/o DSA	w/ DSA	w/o DSA	w/ DSA
EP959	78	6	4.69	0.43
EP559	78	6	4.42	0.39
EP951	78	6	5.34	0.55
EP551	78	6	4.36	0.38
SEP501	80	6	2.00	0.19
TWODANT*	N/A	6	N/A	0.06

Table 1 Number of Iterations and CPU time for the Test Problem

.

•

\* pure CPU for sweeping and DSA only